


RAEBANK, CHAPEL STREET, SELKIRK, TD7 4LB

Scottish Borders Council
Town And Country
Planning (Scotland) Act
1997

REFUSED

subject to the
requirements of the
associated Decision
Notice

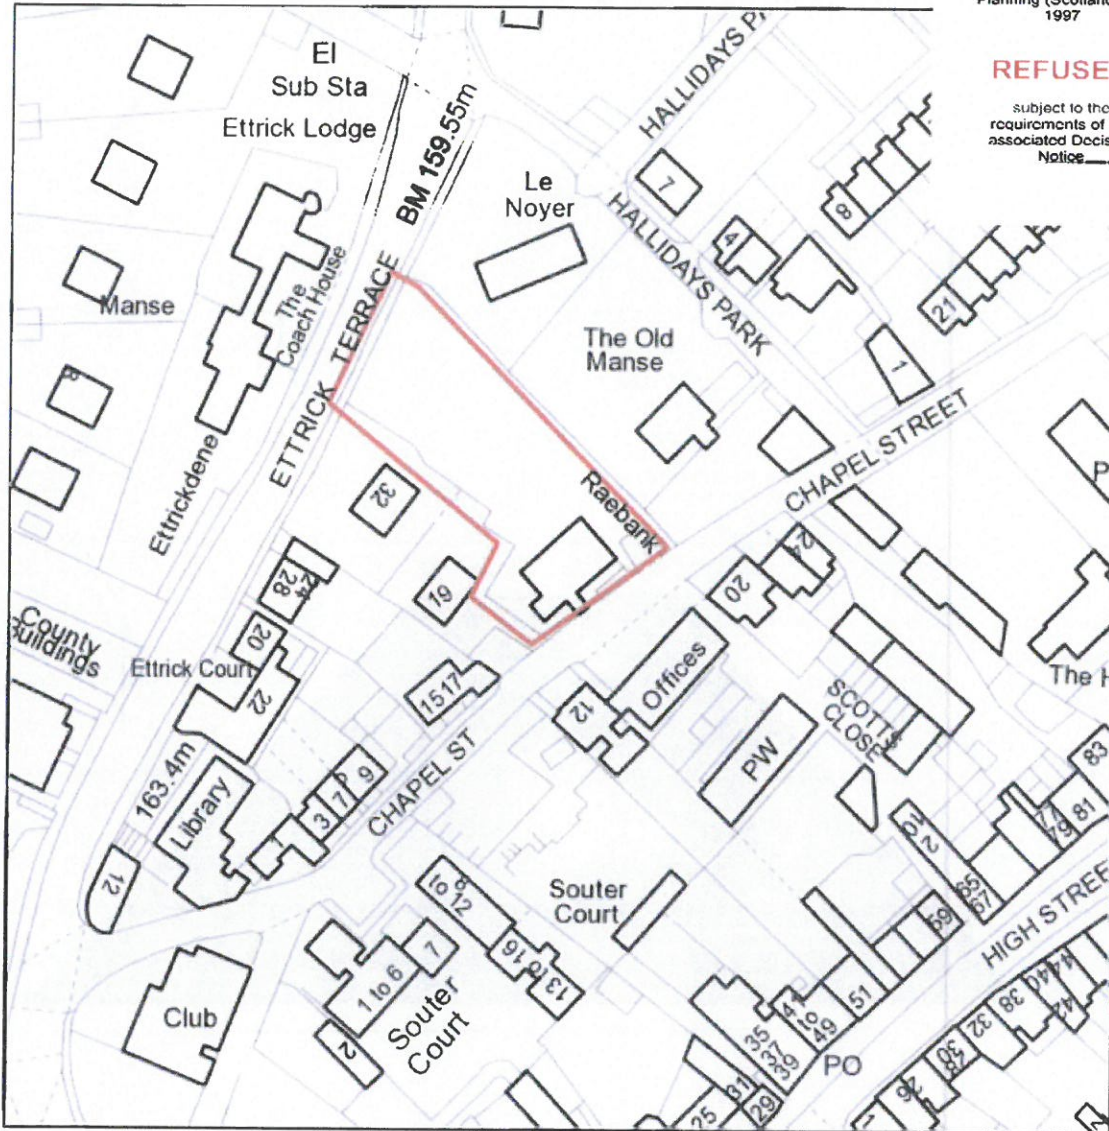

Information

- Application Boundary
- Land in Ownership

Online Ref:
000121567
Date: 29/5/2015

Scale 1:1250 (4Ha)





Due to OS licensing conditions, you/your agent may only use this map for official Planning purposes. If you wish to use the map for other uses, you must first obtain a separate licence from OS.

REFUSED
subject to the
requirements of the
associated Decision
Notice

Roof layout

Roof 1

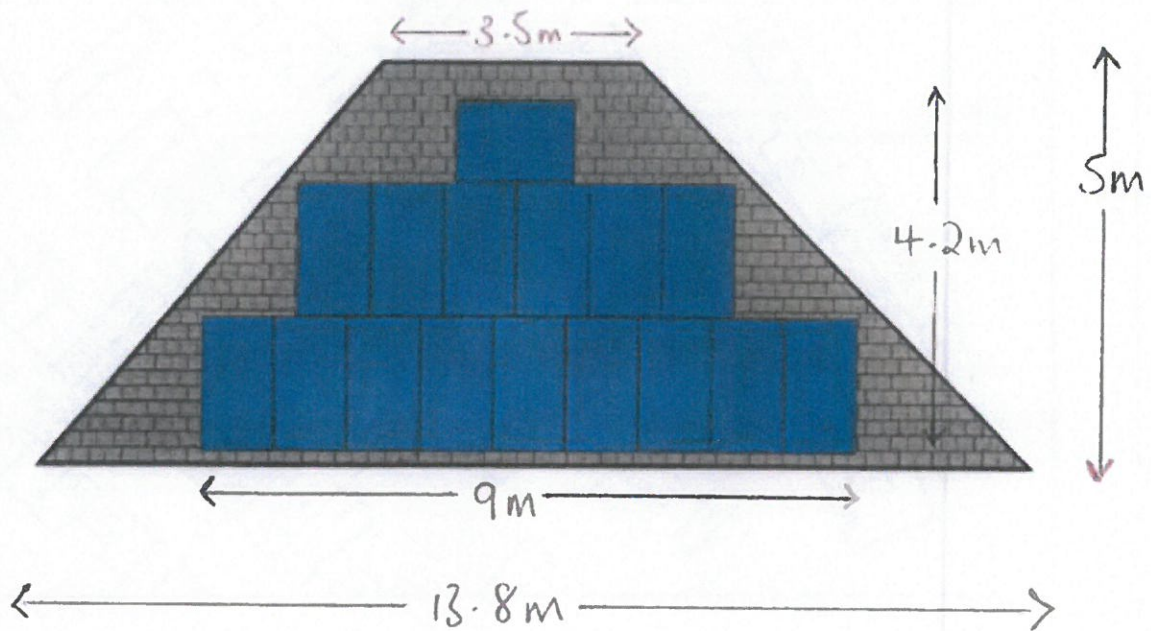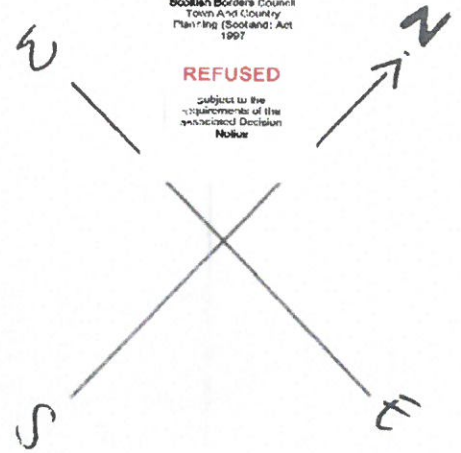

ROOF:

- 13.8m (L) x 5m (H)
- Orientation is South East.


PV PANELS:

- 1m (L) x 1.6m (H) (portrait)
- 16 panels in total.

STP250 - 20/Wd
STP245 - 20/Wd
STP240 - 20/Wd

REFUSEDsubject to the
requirements of the
associated Decision
Notice

250 Watt POLYCRYSTALLINE SOLAR MODULE

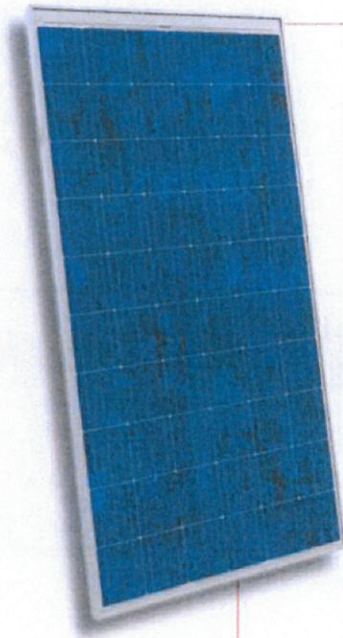

Features

**High module conversion efficiency**

Module efficiency up to 15.4% achieved through advanced cell technology and manufacturing capabilities

**Excellent weak light performance**

Excellent performance under low light conditions

**Positive tolerance**

Positive tolerance of up to 5% delivers higher outputs reliability

**Suntech current sorting process**

System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage

**Extended wind and snow load tests**

Module certified to withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal) *


**Withstanding harsh environment**

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline

Certifications and standards:
IEC 61215, IEC 61730, conformity to CE

Trust Suntech to Deliver Reliable Performance Over Time


- World-class manufacturer of crystalline silicon photovoltaic modules
- Unrivaled manufacturing capacity and world-class technology
- Rigorous quality control meeting the highest international standards: ISO 9001: 2008, ISO 14001: 2004 and ISO17025: 2005
- Regular independently checked production process from international accredited institute/company
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing testing: IEC 61701, DIN 50916:1985 T2, DIN EN 60068-2-68)***



Compact and Durable Frame Design

Suntech's new compact frame design is light-weight and easier to handle during installation. The rigid and durable hollow chamber guarantees the same long-term and reliable performance.

Industry-leading Warranty based on nominal power

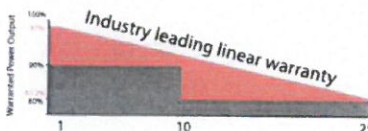

- 97% in the first year, thereafter, for years two (2) through twenty-five (25), 0.7% maximum decrease from MODULE's nominal power output per year, ending with the 80.2% in the 25th year after the defined WARRANTY STARTING DATE.****
- 10-year material and workmanship warranty

IP67


IP67 Rated Junction Box

Supports installations in multiple orientations. High reliable performance, low resistance connectors ensure maximum output for the highest energy production.

* Please refer to Suntech Standard Module Installation Manual for details. **PV Cycle only for EU market.

*** Please refer to Suntech Product Near-coast Installation Manual for details **** Please refer to Suntech Product Warranty for details.

STP250 - 20/Wd
STP245 - 20/Wd
STP240 - 20/Wd

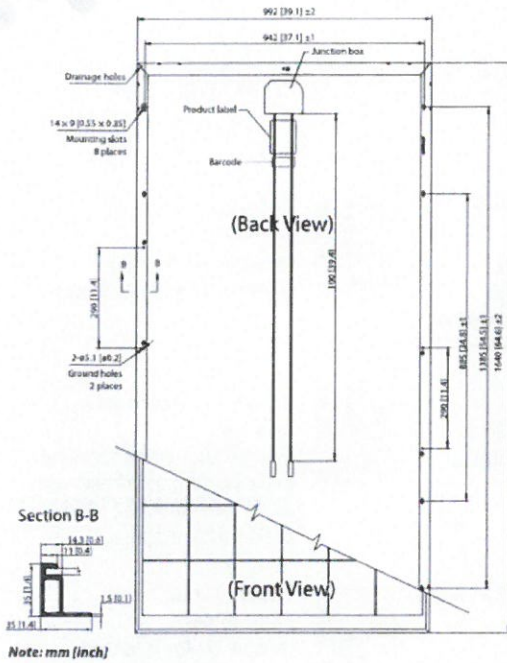

Electrical Characteristics


STC	STP250-20/ Wd	STP245-20/ Wd	STP240-20/ Wd
Maximum Power at STC (Pmax)	250 W	245 W	240 W
Optimum Operating Voltage (Vmp)	30.7 V	30.5 V	30.2 V
Optimum Operating Current (Imp)	8.15 A	8.04 A	7.95 A
Open Circuit Voltage (Voc)	37.4 V	37.3 V	37.2 V
Short Circuit Current (Isc)	8.63 A	8.52 A	8.43 A
Module Efficiency	15.4%	15.1%	14.8%
Operating Module Temperature	-40 °C to +85 °C		
Maximum System Voltage	1000 V DC (IEC)		
Maximum Series Fuse Rating	20 A		
Power Tolerance	0/+5 %		

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5.
Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

NOCT	STP250-20/ Wd	STP245-20/ Wd	STP240-20/ Wd
Maximum Power at NOCT (Pmax)	185 W	181 W	178 W
Optimum Operating Voltage (Vmp)	28.0 V	27.8 V	27.6 V
Optimum Operating Current (Imp)	6.59 A	6.51 A	6.44 A
Open Circuit Voltage (Voc)	34.5 V	34.3 V	34.1 V
Short Circuit Current (Isc)	7.01 A	6.94 A	6.86 A

NOCT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s.
Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

Current-Voltage & Power-Voltage Curve(245-20)

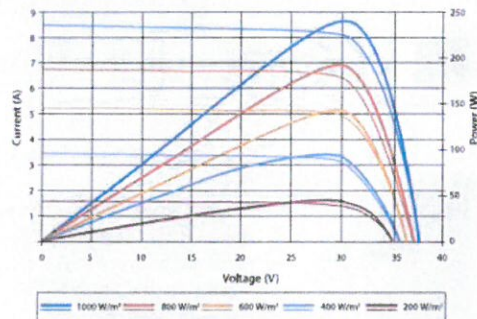

Excellent performance under weak light conditions: at an irradiation intensity of 200 W/m² (AM 1.5, 25 °C) 95.5% or higher of the STC efficiency (1000 W/m²) is achieved

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.43 %/°C
Temperature Coefficient of Voc	-0.33 %/°C
Temperature Coefficient of Isc	0.067 %/°C

Mechanical Characteristics

Solar Cell	Polycrystalline silicon 156 × 156 mm (6 inches)
No. of Cells	60 (6 × 10)
Dimensions	1640 × 992 × 35mm (64.6 × 39.1 × 1.4 inches)
Weight	18.2 kgs (40.1 lbs.)
Front Glass	3.2 mm (0.13 inches) tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP67 rated (3 bypass diodes)
Output Cables	TUV (2Pfg1169:2007) 4.0 mm ² (0.006 inches ²), symmetrical lengths (-) 1000mm (39.4 inches) and (+) 1000 mm (39.4 inches)
Connectors	MC4 connectors

Packing Configuration

Container	20' GP	40' HC
Pieces per pallet	30	30
Pallets per container	6	28
Pieces per container	180	840

Dealer information



Information on how to install and operate this product is available in the installation instructions. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

15/00616/FUL

Scottish Borders Council
Town And Country
Planning (Scotland) Act
1997

REFUSED

subject to the
requirements of the
associated Decision
Notice



15/00616/FUL

Scottish Borders Council
Town And Country
Planning (Scotland) Act
1997

REFUSED

subject to the
requirements of the
insulated Decision
Notice



15/00616/FUL

Scottish Borders Council
Town And Country
Planning (Scotland) Act
1997

REFUSED

subject to the
requirements of the
associated Decision
Notice



