	AI)	A	
	N			

Land South Of The Bungalow, Charlesfield

Technical Note

St Boswells LLP

Job No: 1031906

Doc Ref: RPT-TC-001

Revision: -

Revision Date: 14 July 2021



Project title	Land South Of The Bungalow, Charlesfield	Job Number	
Report title	Technical Note	1031906	

Document Revision History

Revision Ref	Issue Date	Purpose of issue / description of revision
-	12 July 2021	Draft for client comment
Α	14 July 2021	Final
18		

Document Validation (latest issue)

14/07/2021 14/07/2021 14/07/2021

Principal author Checked by Verified by

Signed by: Low, Graeme Signed by: Low, Graeme Signed by: Low, Graeme

[©] Cundall Johnston & Partners LLP ("Cundall") owns the copyright in this report and it has been written for the sole and confidential use of St Boswells LLP. It must not be reproduced in whole or in part or relied upon by any third party for any use whatsoever without the express written authorisation of Cundall. If any third party whatsoever comes into possession of this report, they rely on it at their own risk and Cundall accepts no duty or responsibility (including in negligence) to any such third party.



Contents

1.0	Introduction	3
1.1	Purpose of This Report	3
1.2	Report Structure	3
2.0	Trip Generation	4
2.1	Introduction	4
2.2	Trip Rates	4
3.0	Transportation Response	5
3.1	Introduction	5
3.2	Proposed Vehicle Access	5
4.0	Summary	8



1.0 Introduction

1.1 Purpose of This Report

Cundall has been commissioned by St Boswells LLP to provide transportation advice to support the development of two residential dwellings on land at Charlesfield, St Boswells. As part of the proposals, a new access is to be formed to serve the properties. This short technical note provides further information in relation to the proposals in response to comments raised by Scottish Borders Council (SBC) Roads in relation to planning application (21/000840/PPP).

1.2 Report Structure

Following this short introductory chapter, the report is set out as follows:

- Chapter 2 estimates the magnitude of trips generated by the proposed development;
- Chapter 3 reviews the proposed access arrangements in relation to transportation comments raised by SBC in relation to the proposals; and
- Chapter 4 provides a summary of the findings of the study.



2.0 Trip Generation

2.1 Introduction

The following section sets out the trip generation assumptions used to estimate the level of trips generated by the proposed residential development.

2.2 Trip Rates

TRICS v.7.8.2 has been used to establish the likely trips that could be generated by the proposed development. The following site selection criteria has been applied to select comparable sites from which to determine trip rates for the development:

- Use selection 03 Residential, A Houses Privately Owned;
- Sites located within Greater London and Ireland have been discounted;
- Edge of Town sites selected;
- Weekday surveys selected;
- Vehicle trip rates selected; and
- Sites within 6 20 units selected.

Applying the above criteria resulted in 6 comparable sites being returned and the associated TRICS outputs are provided in Appendix A. The TRICS database identifies the AM and PM peak hours to be 08:00 - 09:00 and 16:00 - 17:00 and Table 2.1 shows the vehicle trip rate and resultant peak hour trip generation for the proposed two residential dwellings which have been used to inform this technical note.

	AM Pe	eak Hour	PM Peak Hour		
	Arrivals	Departures	Arrivals	Departures	
Vehicle Rate (per dwelling)	0.145	0.231	0.188	0.085	
Vehicle Generation (2 dwellings)	1	1	1	1	

Table 2.1 Total Vehicle Trip Rates

As can be seen from the above summary, the proposed development is forecast to generate a maximum of 2 two-way vehicle movements in either the AM or PM peak hour. The development will therefore have a negligible impact both in terms of its capacity and safe operation on the operation of the adjacent road from which it is proposed to take access from.



3.0 Transportation Response

3.1 Introduction

The site is located at Charlesfield, St Boswells and is bound by existing residential properties to the north and Charlesfield Industrial Estate to the south. Proposals include the construction of two residential dwellings, with associated parking and the formation of a new access from the adopted road to the north.

This chapter provides additional transportation information to support the application in response to comments provided by SBC Roads on the initial planning application.

3.2 Proposed Vehicle Access

It is proposed to form a new access on the unclassified road located to the north of the site to serve the proposed two house residential development, with the access able to be constructed using land within the ownership of the applicant.

3.2.1 Visibility Review

SBC have identified a requirement to provide 2.4x120m visibility splays in association with the proposed access and the ability to provide this is shown in Figure 3.1 below, with the drawing included at a larger scale in Appendix B.

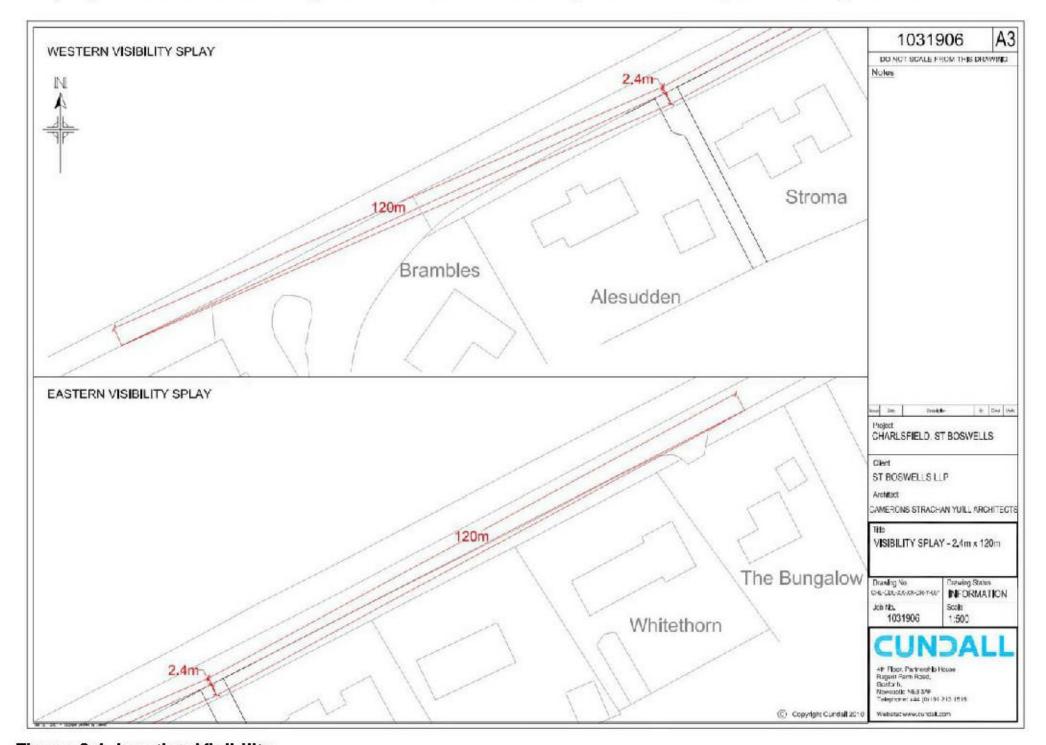


Figure 3.1 Junction Visibility

As can be seen from Figure 3.1, the required visibility can be achieved to the east. An existing junction is, however, located within the western visibility splay although the required visibility can be provided to traffic approaching from the



west. Whilst the junction is located approximately 70m to the west of the proposed access and therefore falls within the visibility splay, vehicles will be travelling at low speeds when accessing the unclassified road and travelling east towards the proposed access junction. It is therefore considered that the location of the nearby junction will not generate any safety issues which would have an impact on the intention to form a new access in the location being proposed, particularly with the low level of vehicle trips anticipated to be generated by the proposed development (2 two-way movements in either the AM or PM peak hours).

A review of Personal Injury Accident Data using the CrashMap database confirms that no accidents have been recorded in the vicinity of the site over the last ten years, demonstrating that the local road network currently operates in a safe manner. Figure 3.2 provides an extract from the database showing the road network located in the vicinity of the site.

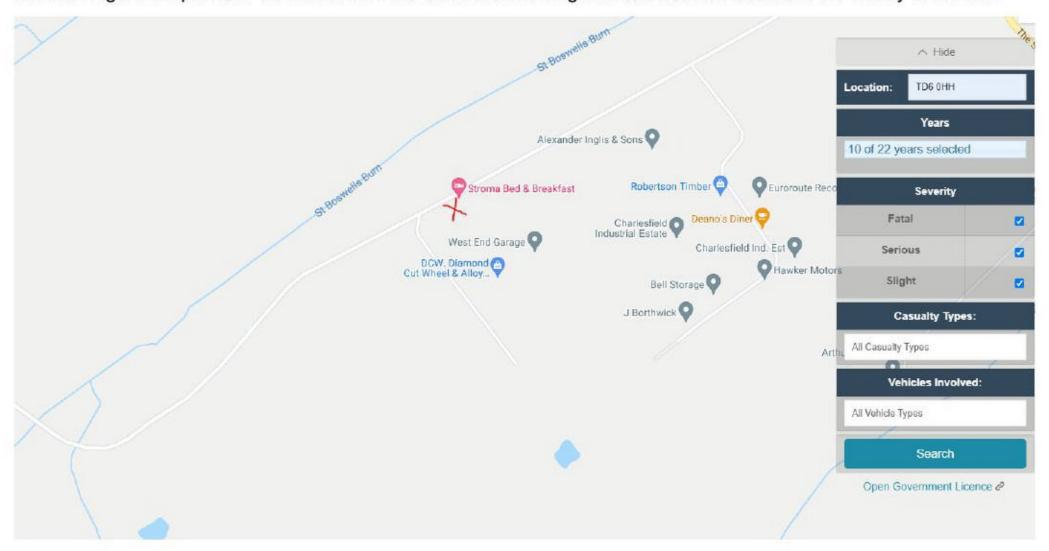


Figure 3.2 Accident History

It is considered that the formation of a new access to serve two properties will not have an impact on the road's current operation in terms of safety, given the negligeable level of trips generated by the proposed development.

3.2.2 Indicative Site Access

It is proposed to provide an access with a 5m width to enable a vehicle accessing the site to pass a vehicle waiting to leave the site. This arrangement will also enable a vehicle leaving the site to be visible to a second vehicle accessing the site and provide opportunity for this to wait prior to proceeding. The access road will be constructed on an alignment which will provide clear visibility for approximately 30m to enable the wider carriageway located at the northern end of the access, to provide an effective passing place and this arrangement is shown in Figure 3.3 and provided at a larger scale in Appendix B.



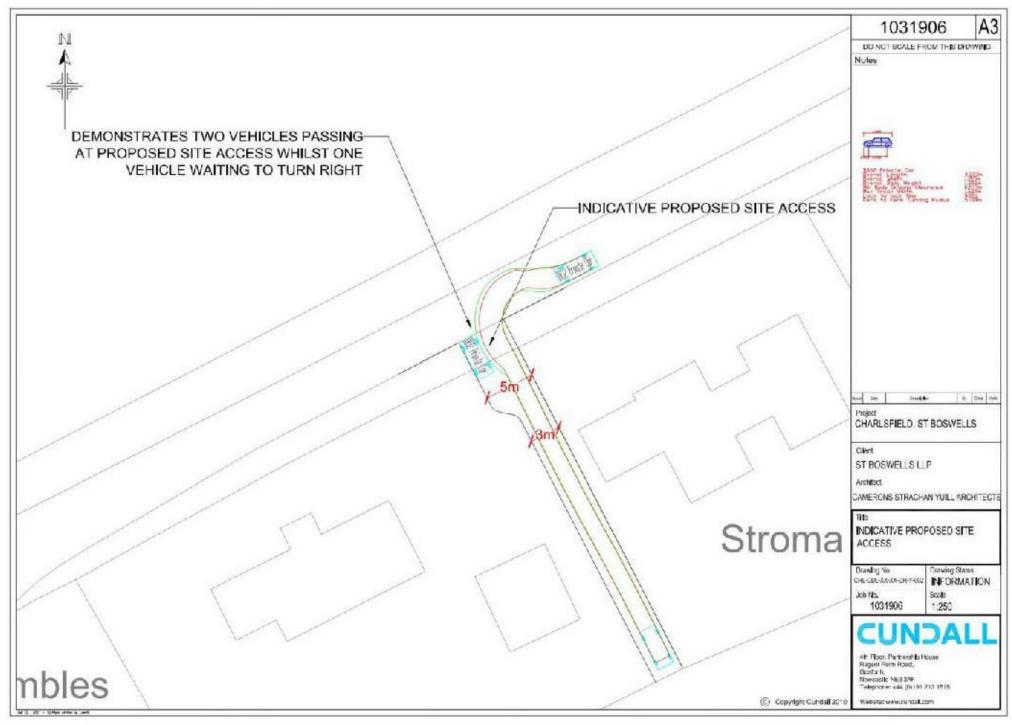


Figure 3.3 Proposed Site Access

AutoTrack has been used to review the operation of the proposed access junction based on a proposed width of 5m, with the results of the analysis shown in Figure 3.3. The analysis confirms that the proposed access arrangements can accommodate a vehicle accessing the site whilst another is waiting to turn right out of the site. It is unlikely, given the scale of the development proposals which is forecast to generate a maximum of 1 arrival and 1 departure in either peak hour, that two vehicles will meet at the access on a regular basis and it is considered that the proposed arrangement is sufficient to support the development proposals.

It is proposed to maintain the 5m access width for a distance of 7m to enable a vehicle to pass a stationary vehicle on the basis of the analysis shown in Figure 3.3.

The first 6m of the access will be constructed using a bituminous finish, with the verge crossing constructed in accordance with Scottish Borders Council standard detail DC2 in line with SBC requirements.

The site layout will also ensure that parking will be provided for a minimum of two vehicles within the curtilage of the plot.

3.2.3 Servicing and Deliveries

It is expected that servicing and deliveries will be accommodated from the adjacent road network, as per the arrangement for existing properties in the vicinity of the site, with refuse bins pulled to the back of the kerb by the occupiers for collection.



4.0 Summary

Cundall has been commissioned by St Boswells LLP to provide transportation advice to support the development of two residential dwellings on land at Charlesfield, St Boswells.

This note has demonstrated that the proposed development will generate a minimal number of trips on an hourly basis, with a limited chance for a vehicle accessing the site to meet one which is leaving. Nevertheless, it is proposed to provide a 5m wide access for the initial 7m to enable a vehicle to pass a stationary vehicle waiting to leave the access.

The required visibility can be achieved in both directions and that there are no road safety concerns which would prevent the formation of a new development access on the unclassified road located to the north of the site.

The first 6m of the access will be constructed using a bituminous finish, with the verge crossing constructed in accordance with Scottish Borders Council standard detail DC2 in accordance with SBC requirements.

Space will be provided within the site to accommodate two parked vehicles and enable vehicles to access and leave the site in a forward gear. The site would, however, be expected to be serviced from the external road network.



Appendix A

Sundal Regent Centre Newcastle-upon-Tyne Licence No. 83040:

Calculation Reference: AUDIT-830401-210712-0757

TRIP RATE CALCULATION SELECTION PARAMETERS:

Land Use : 03 - RESIDENTIAL

Category : A - HOUSES PRIMATELY OWNED

TOTAL VEHICLES

Selected regions and areas:

SOUTH EAST KC KENT 1 cays 04EAST ANGLIA NE NORFOLK 2 cays: SUFFICIAL SF 1 cays 06 WEST MIDLANDS. SH SHROPSHIRE 1 0878 WWX WWARWICKSHIRE 1 cays YORKSHIRE & NORTH LINCOLNSHIRE 07 SY SOUTH YORKSHIRE 1 0878 10 WALES VG. MALE OF GLAMORGAN 1 cays

This section displays the number of survey days per TRICS(8) sub-region in the selected set.

Primary Filtering selection:

This data displays the chosen trip rate parameter and its selected range. Only sites that fall within the parameter range are included in the trip rate calculation

Parameter: No of Diwellings Actual Range 8 to 19 (units:) Range Selected by User 5 to 20 (units:)

Parking Spaces Range: A Surveys Included

Parking Spaces per Dwelling Range (All Surveys Included)

Bedrooms per Diwelling Range All Surveys Included

Percentage of dwellings privately owned All Surveys Included

<u> Public Transport Provision .</u>

Selection by Include a Lauryeys

Date Range 01/01/13 to 09/09/20

This data displays the range of survey dates selected. Only surveys that were conducted within this date range are included in the trip rate calculation.

Serected survey days:

Monday 1 days
Wednesday 4 days
Thursday 2 days
Friday 1 days

This data displays the number of selected surveys by day of the week

<u>Serected survey types:</u>

Manual count 7 days
Directions ATC Count 1 days

This data displays the number of manual classified surveys and the number of unclassified ATC surveys, the total adding up to the overall number of surveys in the selected set. Manual surveys are undertaken using staff, whilst ATC surveys are undertaking using machines.

<u>Serected Locations :</u>

Edge of Town 5
Neighbourhood Centre (PPS5 Local Centre) 2

This data displays the number of surveys per main location category within the selected set. The main location categories consist of Free Standing, Edge of Town, Suburban Area, Ivergnbourhood Centre, Edge of Town Centre, Town Centre and Not Khown.

Selected Location Sub Categories.

Residentia Zone 5
Village 2

This data displays the number of surveys per location sub-category within the selected set. The location sub-categories consist of Commercial Zone, Industrial Zone, Development Zone, Residential Zone, Retail Zone, Bulit-Up Zone, Village, Out of Town, High Street and No Sub Category.

TRICS 7.8.2 2:062: B20.20 Database right of TRICS Consort um Limited, 202: A irights reserved Monday 12/07/21 Page 2

Cundal Recent Centre Newcastle-upon-Tyne Licence No. 830401

Secondary Filtering selection:

<u>use Class.</u>

03 8 days

This data displays the number of surveys per Use Class classification within the selected set. The Use Classes Order 2005, has been used for this purpose, which can be found within the Library module of TRICS (3).

Population within 500m Ranger:

All Surveys Included Population within 1 mile.

 1,001 to 5,000
 3 days

 5,001 to 10,000
 1 days

 10,001 to 15,000
 3 days

 15,001 to 20,000
 1 days

This data displays the number of selected surveys within stated 1-mile radii of population.

<u>Population within 5 milest</u>

25,001 to 50,000	2 days
50,001 to 75,000	1 day∈
75,001 to 100,000	1 days
125,001 to 250,000	3 days
250,001 to 500,000	1 days

This data displays the number of selected surveys within stated 5-mile radii of population.

Can ownership within 5 miles i

C 6 to 1.0	4 days
1 1 to 1.5	3 days
c 6 to 2.0	1 days

This data displays the number of selected surveys within stated ranges of average cars owned per residential divelving, within a radius of 5-miles of selected survey sites.

Travel Plant

No 8 days

This data displays the number of surveys within the selected set that were undertaken at sites with Travel Plans in place, and the number of surveys that were undertaken at sites without Travel Plans.

PTAL Ratings

No PTAL Present 8 days

This data displays the number of selected surveys with PTAL Ratings.

Odvid-19 Restrictions

Mes At least one survey within the selected data set was undertaken at a time of Covid-19 restrictions.

Page 3 Licence No. 830401

Cundal Newcastle-upon-Tyne Regent Centre

<u>LIST OF SITES relevant to selection parameters.</u>

DETACHED & SEMI-DETACHED KENT 1 KC-03-A-05

ROCHESTER ROAD NEAR CHATHAM

BURHAY |Neighbourhood Centre (PRS6 Local Centre)|

∵ lage.

3 Total No of Dwellings:

Survey date, FRIDAY 22/09/17 Survey Type, MANUAL

NF-03-A-03 DETACHED HOUSES NORFOLK

HALING WAY THETFORD

Edge of Town Residentia Zone

Total No of Dwellings: 10

15/09/15 Survey date. MEDNESDAY : Survey Type, MANUAL

NORFOLK NF-03-A-10 MIXED HOUSES & FLATS

HUNSTANTON ROAD HUNSTANTON

Edge of Town Residentia Zone

Total No of Dwellings:

Survey date. MEDNESDAY. 12/09/18 Survey Type, DIRECTIONAL ATO COUNT

SF-03-A-05 DETACHED HOUSES SUFFOLK

MALE LANE

BURY ST EDMUNDS

Edge of Town Residentia Zone

18 Total No of Dwellings:

09/09/15 Survey Type, MANUAL Survey date. MEDNESDAY

SH-03-A-06 SHROPSHIRE BUNGALOWS

ELLESMERE ROAD SHREWISBURY

Edge of Town Residentia Zone

Total No of Dwellings: 16

Survey date, THURSDAY 22/05/14 Survey Type, MANUAL SY-03-A-03 BUNGALOWS & DETACHED SOUTH YORKSHIRE

CHURCH LANE NEAR BARNSLEY MMORSBROUGH

Neighbourhood Centre (PPS6 Local Centre).

W lage.

Total No of Dwellings: 19

Survey date. MEDNESDAY. Survey Type, MANUAL 09/09/20 VALE OF GLAMORGAN VG-03-A-01 SEMI-DETACHED & TERRACED

ARTHUR STREET

BARRY

Edge of Town Residentia Zone

12 Total No of Dwellings:

0.8/05/17 Survey Type, MANUAL Survey date, MONDAY WARWICKSHIRE

BUNGALOWS WK-03-A-02

NARBERTH WAY COMENTRY POTTERS GREEN Edge of Town Residential Zone

Total No of Dwellings: 17

17/10/13 Survey date, THURSDAY Survey Type, MANUAL

This section provides a list of all survey sites and days in the selected set. For each individual survey site, it displays all unique site reference code and site address, the selected trib rate calculation parameter and its value, the day of the ϵ week, and date of each survey, and whether the survey, was a manual classified count or an ATC count.

Cundal Redent Centre Newcastle-upon-Tyne Licence No. 830401

TRIPIRATE for Land Use 03 - RESIDENTIAL/A - HIGUSES PRIMATELY OWNED.

TOTAL VEHICLES

Calculation factor: 1 DWELLS

BOLD print indicates peak (busiest) period

	4RRSV4LS			DEPARTURES			TOTALS		
	ls.c	awe.	Trip	No.	Ave	Tho	No	ave.	Trip
Time Range	Days	DWELLS	Rate	Days	DWELLS	Rate	Days	DWELLS	Rate
00 00 - 01:00	50 St.						885		
01 00 - 02:00									
02 00 - 03:00								2	
03 00 - 04:00									
04 00 - 05:00								2	
05 00 - 06:00									
06 00 - 07:00									
07 00 - 08:00	8	15	0.068	8	:5	0.154	8	15	0 222 0 376 0 274
08 00 - 09:00	8	15	0 145	8	1.5	0.231	8	15	0.376
09 00 - 10:00	8	15	0.077	8	1.5	0.197	8	15	0.274
10 00 - 11100	8	15	0.214	8	15	0.162	8	15	0.376
11 00 - 12:00	8	15	0:37	8	1.5	0.137	8	15	0 274 0 359 0 290
12 00 - 13:00	8	15	0 162	8	15	0.197	8	15	0.359
13 00 - 14:00	8	15	0:45	8	1.5	0.145	8	15	0 290
14 00 - 15:00		15	0 197	8	1.5	0.145	8	15	0.342
15 00 - 16:00	8	15	0.222	8	15	0.239	8	15	0.461
16 00 - 17:00	8	15	0 171	8	15	0.154	8	15	0.325
17 00 - 18:00	8	15	0 188	8	: 5	0.085	8	15	0.273
18 00 - 19:00	8	15	0.214	8	15	0.162	8	15	0.376
19 00 - 20:00									10
20 00 - 21:00	8								
21 00 - 22:00								-	2
22 00 - 23:00								2	
23 00 - 24:00									
Tota Rates:			1,940			2,008			3,948

This section displays the trip rate results based on the selected set of surveys and the selected count type (shown just). above the table). It is solit by three main columns, representing arrivals trips, departures trips, and total trips (arrivals) plus departures). Within each of these main columns are three sub-columns. These display the number of survey days i where count data is included (per time period), the average value of the selected trip rate calculation parameter (per l time period), and the trip rate result (per time period). Total trip rates (the sum of the column) are also displayed at the ϵ foot of the table.

To optain a trib rate, the average (mean) trib rate parameter value (TRP) is first calculated for all selected survey days. that have count data available for the stated time period. The average (mean) number of arrivals, departures or totals i (whichever applies) is also calculated (COUNT) for all selected survey days that have count data available for the stated. time period. Then, the average count is divided by the average trip rate parameter value, and multiplied by the stated in calculation factor (shown just above the table and abbreviated here as FACT). So, the method is 1 COUNT/TRP $^{\kappa}$ FACT. This rates are then rounded to 3 decimal places.

The survey data, graphs and all associated supporting information, contained within the TRECS Database are published. by TRICS Consortium Limited ("the Company") and the Company claims copyright and database rights in this published. work. The Company authorises those who possess a current TRICS licence to access the TRICS Database and copy the l data contained within the TRIOS Database for the licence holders, use only. Any resulting copy must retain all copyrights. and other proprietary notices, and any discialmen contained thereon.

The Company accepts no responsibility for loss which may arise from reliance on data contained in the TRICS Database. TND warranty of any kind, expression molied, is made as to the data contained in the TROOS Diatabase $^\circ$

Parameter summary

Trip rate parameter rance selected: 8 - 19 (unita:). Survey date date rande: 01/01/13 - 09/09/20 Number of weekdays (Monday-Friday):: Number of Saturdays Number of Sundays: Surveys automatically removed from selection. 0 Surveys manually removed from selection. 0

This section displays a guick summary of some of the data filtering selections made by the TRLOS® user. The trip rate i calculation parameter range of all selected surviews is displayed first, followed by the range of minimum and maximum: survey dates selected by the user. Then, the total number of selected weekdays and weekend days in the selected set of surveys are show. Finally, the number of survey days that have been manually removed from the selected set outside of . the standard filtering procedure are displayed.



Appendix B

